

HOT WIRES

Cables / Snakes / DIs



Microphone Cables

Quality sound and construction that you can rely on! Hot Wires microphone cables have the strength and durability to withstand the road and still perform everyday. Four new models added for 2010. **[PACK]**


MC12-3 3' XLR-XLR Mic Cable	58680
MC12-6 6' XLR-XLR Mic Cable	58682
MC12-10 10' XLR-XLR Mic Cable	58679
MC12-15 15' XLR-XLR Mic Cable	58681
MC12-20 20' XLR-XLR Mic Cable	48412
MC12-25 25' XLR-XLR Mic Cable	48414
MC12-25 HZ 25' XLR-QTR Mic Cable, Hi-Z	48413
MC12-50 50' XLR-XLR Mic Cable	48415



Instrument Cables

Quality sound and construction that you can rely on! Hot Wires instrument cables have the strength and durability to withstand the road and perform everyday. Cable thickness - 6mm for all models, except IC-20-BR - 6.5mm. Four new models added for 2010. **[PACK]**

IC-3 3' QTR-QTR Instr. Cable	58685
IC-6 6' QTR-QTR Instr. Cable	58687
IC-10 10' QTR-QTR Instr. Cable	48410
IC-10-HS 10' QTR-QTR Instr. Cable Heat Shrink tubing for added strain relief.	54563
IC-15 15' QTR-QTR Instr. Cable	58683
IC-20 20' QTR-QTR Instr. Cable	48411
IC-20-BR 20' QTR-QTR Braided Instr. Cable	54564
IC-25 25' QTR-QTR Instr. Cable	58684

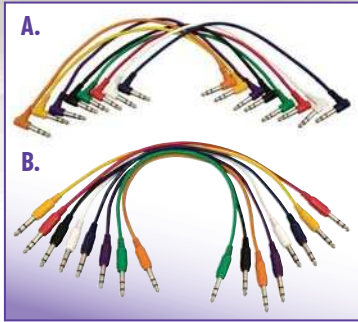


Patch Cables

A. PC18-17QTR-R 58760
QTR-QTR Right-Angle Patch Cables, 17".
Multi-color 8-pack.

PC18-17TRS-R 58762
Same as PC18-17QTR-R; TRS-TRS ends.

B. PC18-17QTR-S 58761
QTR-QTR Straight Patch Cables, 17".
Multi-color 8-pack.

PC18-17TRS-S 58763
Same as PC18-17QTR-S; TRS-TRS ends.

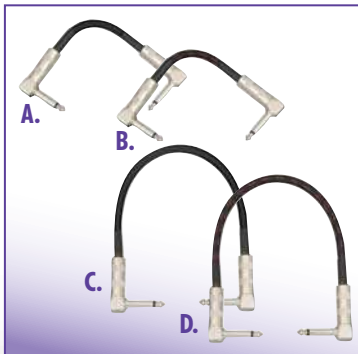

Pedal Couplers

A. PC306B 58764
QTR-QTR Right-Angle Pedal Coupler.
Black, 6".

B. PC306T 58767
Same as PC306B; Tweed cable covering.

C. PC312B 58765
QTR-QTR Right-Angle Pedal Coupler.
Black, 12".

D. PC312T 58766
Same as PC312B; Tweed cable covering.



Speaker Cables

Quality sound and construction that you can rely on! Hot Wires speaker cables have the strength and durability to withstand the road and perform everyday. Cable thickness - 7mm; 14-gauge wires. SP14-10 and two new Banana Cables added for 2010. **[PACK]**

SP14-6 48418
6' QTR-QTR Speaker Cable

SP14-10 58775
10' QTR-QTR Speaker Cable

SP14-25 48416
25' QTR-QTR Speaker Cable

SP14-50 48417
50' QTR-QTR Speaker Cable

SP14-10-BA 58758
10' Banana-QTR Speaker Cable

SP14-25-BA 58759
25' Banana-QTR Speaker Cable

Speakon® Speaker Cables with Neutrik® NL2 Connectors
Twist-lock Speakon® connectors are quickly becoming the standard pro audio connection at all levels. These Hot Wires cables use authentic Neutrik® NL2FC connectors to terminate 14-gauge wires for use with high-power speakers and amplifiers. Hook-and-loop cable-tie included. **[PACK]**

SP14-10SS 55886
10' Speakon-Speakon

SP14-25SS 55887
25' Speakon-Speakon

SP14-50SS 55888
50' Speakon-Speakon

SP14-10SQ 55891
10' Speakon-QTR

SP14-25SQ 55890
25' Speakon-QTR

SP14-50SQ 55892
50' Speakon-QTR

Perfect Pair Powered Speaker Interconnect Cables
Perfect Pair Combo Cables maximize the convenience of powered speakers. They carry both AC power and double-shielded line level signal. This means that only one power drop is necessary by the mixing position, from which power and signal can be sent with just one cable run. 36" Tails at both ends ensure that there is plenty of length to accommodate any setup. Authentic Neutrik® XLR connectors provide reliability in connections and ease of use. Power connections are made via industry standard IEC plugs, compatible with most popular powered speaker models. A great alternative to running multiple extension cords and microphone cables. 24-Gauge signal lines; 14-gauge AC power cord. **[PACK]**


MP-COMBO25 55840
25' Combo Cable

MP-COMBO50 55841
50' Combo Cable

MP-COMBO75 55842
75' Combo Cable

MP-COMBO100 55843
100' Combo Cable

MP-COMBO Connector Ends





Stage Snake Boxes

These stage boxes provide (XLR) female input channels plus 4 (XLR) male returns. All inputs and returns feature locking connections for a secure fit. Each connector is hand soldered and individually insulated to prevent electrical shorts even after years of use. Features include quick-release connectors, well-protected and flexible cable bundling, and a heavy-duty all metal chassis box. Comes with a built-in easy carrying handle and protective black nylon bag.

Return Type: XLR Male

Cable Gauge: 26 Gauge inner core diameter; 21 Gauge outer core diameter

Construction: 16 Gauge steel box

A. SNK8450 50' in length. SNK84100 100' in length. SNK8450 / SNK84100 No. of Inputs: 8 No. of Returns: 4 Channels: 12	52897	B. SNK12450 50' in length. SNK124100 100' in length. SNK12450 / SNK124100 No. of Inputs: 12 No. of Returns: 4 Channels: 16	52896	C. SNK16450 50' in length. SNK164100 100' in length. SNK16450 / SNK164100 No. of Inputs: 16 No. of Returns: 4 Channels: 20	52899
D. SNK20450 50' in length. SNK204100 100' in length. SNK20450 / SNK204100 No. of Inputs: 20 No. of Returns: 4 Channels: 24	52902	E. SNK24450 50' in length. SNK244100 100' in length. SNK24450 / SNK244100 No. of Inputs: 24 No. of Returns: 4 Channels: 28	52904		

CTA6600
48640

Cable Ties

The perfect way to contain your unruly cables! They provide an easy, neat way to secure your guitar, mic and power cords. The fabric strips feature Velcro® style closures to hold your coiled cables in place. Ties can remain on the cables at all times. Packaged and sold 5 per pack.

!PACK! →



DB500
53696

Direct Box

The DB500 Direct Box transforms any high-impedance 1/4" source into a low-impedance (XLR) signal ready to be sent long distances to a mixing board or recording console. Its passive design features a high quality transformer, ground lift switch, and does not require batteries or phantom power. Perfect for bass/ acoustic guitar, keyboards, and DJ equipment.

Input Impedance: 350K ohms
Output Impedance: 80 ohms
Dimensions: (w)4.75 x (h)1.375 x (d)2.875"
Weight: .5 lbs.
Power: Passive
Color: Black